PNY TECHNOLOGIES®

XLR8™ Performance Edition

NVIDIA SLI READY

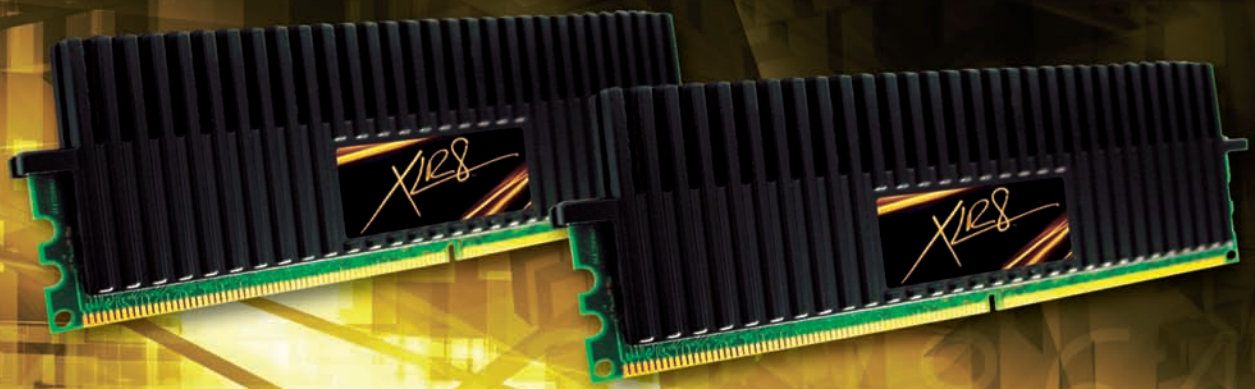

D22GX93XLP-5

XLR8™ Performance Memory

Specifications[1]

Qualified Speed (Bandwidth)[2]	PC2-9384
Qualified Speed (MHz)[2]	1173 MHz
Qualified Latencies[2]	5-5-5-15
Qualified Voltage[2]	2.2 volts
Qualified and Recommended Motherboard	NVIDIA 680i SLI

Features[1]

Heat Spreaders	Custom designed, black finned aluminum heat sink with excellent thermal characteristics
NVIDIA SLI Certified	Yes
EPP (Enhanced Performance Profile)	EPP enabled, 1173MHz 5-5-5-15 2.2V
Additional SPD Programming Info[2]	JEDEC standard for broad DDR2 motherboard compatibility
Chip Organization	Double-sided with sixteen 64x8 DRAM chips
Contents	2 1GB DDR2 DIMMs
Warranty[3]	PNY Lifetime Replacement Warranty

[1] Subject to change without notice.

[2] Some system configurations or motherboards may not operate at the published gamer memory speeds and timing settings. Any attempt to run the computer faster than the published speed, overclocking, or modifying the system's timing may result in damage to computer components and may void the respective warranties of the computer and/or components.

[3] See PNY website for warranty information, www.pny.com

The PNY logo is a registered trademark of PNY Technologies, Inc. All other trademarks are the property of their respective owners. Copyright © 2007 PNY Technologies, Inc. All rights reserved.